

VERTIC TRIPLE LOCK

The Ultimate Rope Access Harness with a Multitude of Innovative Details.

The VERTIC is a fully-equipped harness for fall arrest, work positioning and suspension. This harness is certified according to European and international standards and leaves nothing to be desired. Its comprehensive range of features makes it suitable for every conceivable application in rope access technology—a perfect all-rounder.



Contact
Sebastian Straub
EDELRID GmbH & Co. KG
Achener Weg 66
88316 Isny/Germany

Tel. +49 (0) 7562 981 164
Fax. +49 (0) 7562 981 100
s.straub@edelrid.de
www.edelrid.de

To ensure maximum comfort in every working position, the semi-rigid waist belt and the semi-rigid leg loops are cut extra wide and padded with breathable 3D mesh. This design ensures maximum support and excellent air circulation. The waist belt is fixed to the vertical back straps with a VCR fastener. This allows for optimal distribution of the load between the waist belt and the shoulder straps when heavy equipment is carried. At the same time, the VCR fastener enables quick adjustment of the length between the waist belt and the leg loops.


Inspired by our climbing harnesses, the leg loops have a three-dimensional design and elastic inserts at the front, thus ensuring maximum freedom of movement and unique hanging comfort. The ergonomic shape of the padded shoulder straps reduces pressure points on the neck and at the nape of the neck. Thanks to the self-locking Triple Lock buckles on the chest strap, it is easy to put on or take off the VERTIC TRIPLE LOCK quickly without pulling it over the head.

One special feature is the integrated chest ascender according to EN 12841-B (150 kg). In contrast to conventional rope access harnesses, the chest ascender is firmly



sewn into the VERTIC TRIPLE LOCK. This prevents it from rotating around its own axis. At the same time, the removable Chestfit system (two elastic bands around the chest) ensures that the chest ascender remains close to the body, regardless of the load on the harness system. This combination results in an unprecedented efficiency when climbing on the rope.

It has two fall arrest eyelets according to EN 361 (sternal and dorsal), and a ventral eyelet according to EN 813 (maximum user weight: 150 kg), as well as two lateral positioning eyelets for work position and standby position according to EN 358. Furthermore, the complete harness is certified according to ANSI Z359.11, which makes it one of the most versatile rope access harnesses on the market.

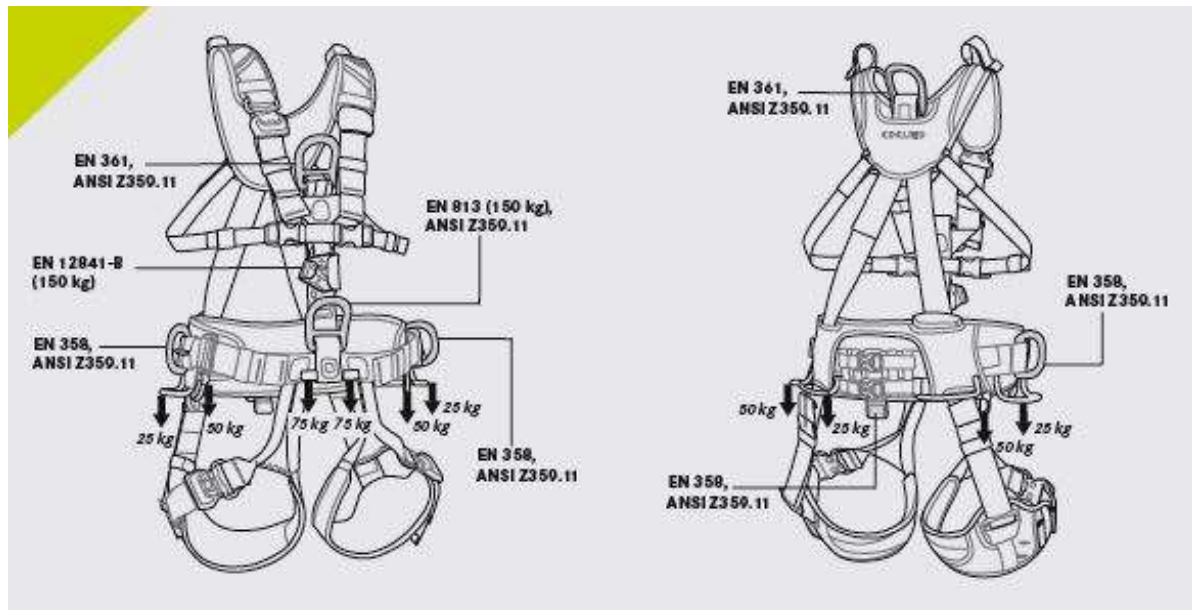

The VERTIC TRIPLE LOCK has four rigid gear loops for up to twelve carabiners each for transporting and organizing equipment, various attachment possibilities for equipment holders, first aid kit, work positioning seat and tool bag, as well as two loops on the chest harness for accommodating the carabiner for a lanyard. It is equipped with an integrated RFID chip, making deployment documentation easy to do and not just a necessary evil.

**Technical data:**

- Weight: 2250 g (size 1), 2350 g (size 2)
- Certification: ANSI / ASSE Z359.11-2014, EN 813 (150 kg), EN 12841-B (140 kg), EN 358, EN 361